

OPA828 Low-Offset, Low-Drift, Low-Noise, 50-MHz, 36-V JFET-Input Operational Amplifier

1 Features

- Low Input Voltage Noise Density: 4.3 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
- Input Voltage Noise: 0.1 Hz to 10 Hz: 120 nV_{RMS}
- Low Input Bias Current: 1 pA
- Input Offset Voltage: 15 μV
- Input Offset Drift: 0.5 $\mu\text{V}/^\circ\text{C}$
- MUX-Friendly Inputs
- Gain Bandwidth: 50 MHz
- Slew Rate: 150 V/ μs
- 16-bit Settling Time: 175 ns
- Overload Supply Current Limit
- Wide Supply Voltage Range: $\pm 2.25\text{ V}$ to $\pm 18\text{ V}$
- Package: 8-pin SOIC

2 Applications

- Data Acquisition (DAQ)
- Optical Module
- Seismic Test Equipment
- Mixed Module
- Ultrasound Scanners

3 Description

The OPA828 JFET is the next generation OPA627 and OPA827 operational amplifier (op amp), combining high speed with high dc precision and ac performance. This op amp supplies low-offset voltage (220 μV maximum), low-drift over temperature (0.5 $\mu\text{V}/^\circ\text{C}$ typical), low bias current (1 pA typical), and low noise (4.3 nV/ $\sqrt{\text{Hz}}$ typical) with only 340-nV_{PP} 0.1- to 10-Hz noise. The OPA828 operates over a wide supply-voltage range, $\pm 4\text{ V}$ to $\pm 18\text{ V}$ on a supply current (5.5 mA/channel typical).

AC characteristics, including a 50-MHz gain bandwidth product (GBW), a slew rate of 150 V/ μs , and precision dc characteristics, make the OPA828 an excellent choice for a variety of systems. These include high-speed and high-resolution data-acquisition systems, such as 16-bit to 18-bit mixed signal systems, transimpedance (I/V-conversion) amplifiers, filters, precision $\pm 10\text{-V}$ front ends, and high-impedance sensor-interface applications.

The OPA828 is available in the industry-standard 8-pin SOIC surface-mount package and is specified from -40°C to $+125^\circ\text{C}$.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
OPA828	SOIC (8)	4.90 mm $\times$ 3.91 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

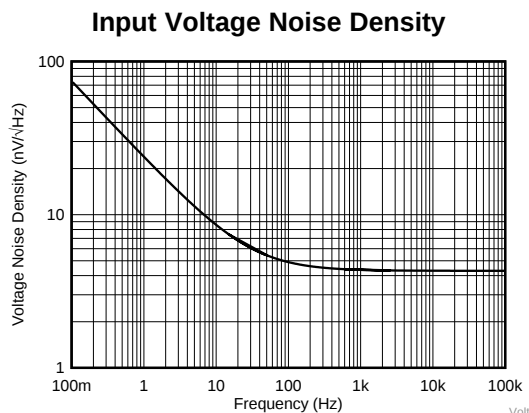


Table of Contents

1 Features	1	8 Application and Implementation	15
2 Applications	1	8.1 Application Information.....	15
3 Description	1	8.2 Typical Application	15
4 Revision History	2	9 Power Supply Recommendations	16
5 Pin Configuration and Functions	3	10 Layout	17
6 Specifications	4	10.1 Layout Guidelines	17
6.1 Absolute Maximum Ratings	4	10.2 Layout Example	18
6.2 ESD Ratings.....	4	11 Device and Documentation Support	19
6.3 Recommended Operating Conditions.....	4	11.1 Device Support.....	19
6.4 Thermal Information	4	11.2 Documentation Support	19
6.5 Electrical Characteristics.....	5	11.3 Receiving Notification of Documentation Updates	19
7 Detailed Description	8	11.4 Community Resource.....	19
7.1 Overview	8	11.5 Trademarks	19
7.2 Functional Block Diagram	8	11.6 Electrostatic Discharge Caution.....	19
7.3 Feature Description.....	9	11.7 Glossary	19
7.4 Device Functional Modes.....	14	12 Mechanical, Packaging, and Orderable Information	19


4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
September 2018	*	Initial release

5 Pin Configuration and Functions

**D Package
8-Pin SOIC
Top View**

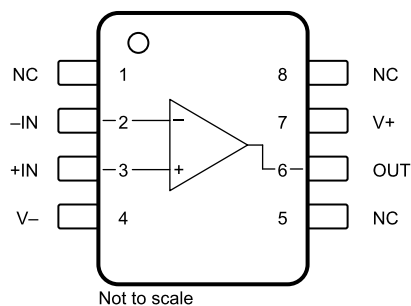

NC: no internal connection

Pin Functions

NAME	NO.	I/O	DESCRIPTION
–IN	2	I	Negative (inverting) input
+IN	3	I	Positive (non-inverting) input
NC	1, 5, 8	—	No internal connection (can be left floating or grounded)
OUT	6	O	Output
V+	7	—	Positive (highest) power supply
V–	4	—	Negative (lowest) power supply

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

			MIN	MAX	UNIT
Supply voltage, $V_S = (V+) - (V-)$	Single-supply		40		V
	Dual-supply		±20		
Signal input pins	Voltage	Common-mode ⁽²⁾	(V-) – 0.5	(V+) + 0.5	
		Differential ⁽³⁾	(V+) – (V-)		
	Current ⁽²⁾		±10		mA
Output short current ⁽⁴⁾			Continuous		
Temperature	Junction, T_J		-55	150	°C
	Storage, T_{stg}		–65	150	

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Ratings*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Input terminals are diode-clamped to the power-supply rails. Current-limit input signals that can swing more than 0.5 V beyond the supply rails to 10 mA or less.
- (3) Input terminals are not clamped to each other with anti-parallel diodes. The JFET input stage allows large differential voltage values up to the supply voltage of the device.
- (4) Short circuit to ground, one amplifier per package.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽¹⁾	±2000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽²⁾	±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_S	Supply voltage, (V+) – (V-)	Single supply	8		36	V
		Dual supply	±4		±18	
	Junction temperature		-40		125	°C

6.4 Thermal Information

THERMAL METRIC ⁽¹⁾		OPA828	UNIT
		D (SOIC)	
		8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	121.5	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	64.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	65	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	18	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	64.3	°C/W

- (1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

6.5 Electrical Characteristics

At $T_A = 25^\circ\text{C}$, $(V+) = 15\text{ V}$, $(V-) = -15\text{ V}$, $V_{CM} = V_O = \text{midsupply}$, $C_L = 20\text{ pF}$, $R_L = 2\text{ k}\Omega$ connected to midsupply, unless otherwise noted.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OFFSET VOLTAGE							
V _{OS}	Input offset voltage			±15	±220	μV	
		T _A = −0°C to 85°C			±280		
		T _A = −40°C to 125°C			±400		
dV _{OS} /dT	Input offset voltage drift	TA = −0°C to 85°C			±2	μV/°C	
		T _A = −40°C to 125°C			±2		
PSRR	Power-supply rejection ratio	8 V ≤ V _S ≤ 36 V		1.4	±5.6	μV/V	
			T _A = −0°C to 85°C		±7		
			T _A = −40°C to 125°C		±10		
INPUT BIAS CURRENT							
I _B	Input bias current			±1	±5	pA	
		T _A = −0°C to 85°C			±400		
		T _A = −40°C to 125°C			±5	nA	
I _{OS}	Input offset current			±1	±5	pA	
		T _A = −0°C to 85°C			±500		
		T _A = −40°C to 125°C			±5	nA	
NOISE							
E _N	Input voltage noise	f = 0.1 Hz to 10 Hz, peak-to-peak		0.34		μV _{PP}	
		f = 0.1 Hz to 10 Hz, RMS		0.12		μV _{RMS}	
e _N	Input voltage noise density	f = 100 Hz		5		nV/√Hz	
		f = 1 kHz		4.3			
i _N	Input current noise density	f = 1 kHz		1.2		fA/√Hz	
INPUT VOLTAGE							
V _{CM}	Common-mode voltage range			(V−) + 2.5	(V+) − 3.5	V	
CMRR	Common-mode rejection ratio	(V−) + 2.5 V < V _{CM} < (V+) − 3.5 V		108	115	dB	
			T _A = 0°C to 85°C	105			
			T _A = −40°C to 125°C	103			
INPUT IMPEDANCE							
Z _{ID}	Differential			10 ¹² 2		Ω pF	
Z _{ICM}	Common-mode			10 ¹² 9		Ω pF	

Electrical Characteristics (continued)

At $T_A = 25^\circ\text{C}$, $(V+) = 15\text{ V}$, $(V-) = -15\text{ V}$, $V_{CM} = V_O = \text{midsupply}$, $C_L = 20\text{ pF}$, $R_L = 2\text{ k}\Omega$ connected to midsupply, unless otherwise noted.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OPEN-LOOP GAIN							
A _{OL}	Open-loop voltage gain	(V−) + 1.6 V < V _O < (V+) − 1.6 V, R _L = 600 Ω		120	130		dB
		(V−) + 1.5 V < V _O < (V+) − 1.5 V, R _L = 10 kΩ		120	130		
		T _A = −0°C to 85°C	(V−) + 1.6 V < V _O < (V+) − 1.6 V, R _L = 600 Ω	117			
			(V−) + 1.5 V < V _O < (V+) − 1.5 V, R _L = 10 kΩ	118			
		T _A = −40°C to 125°C	(V−) + 1.6 V < V _O < (V+) − 1.6 V, R _L = 600 Ω	114			
			(V−) + 1.5 V < V _O < (V+) − 1.5 V, R _L = 10 kΩ	114			
FREQUENCY RESPONSE							
	Unity gain frequency	V _O = 10 mV _{PP} , C _L = 30 pF			50		MHz
	Phase margin	V _O = 10 mV _{PP} , C _L = 30 pF			57		Degrees
GBW	Gain-bandwidth product	V _O = 10 mV _{PP} , C _L = 30 pF			50		MHz
SR	Slew rate	V _O = 10-V step	G = +1		150		V/μs
			G = −1		140		
t _s	Settling time (input to output)	V _O = 4-V step, C _L = 30 pF, G = +1	To ±0.02441% (12-bit accuracy)		110		ns
			To ±0.06104% (14-bit accuracy)		120		
			To ±0.001526% (16-bit accuracy)		175		
	Positive overshoot	V _O = 100-mV step, G = +1, C _L = 30 pF			8%		
	Negative overshoot				4.5%		
	Overload recovery time	G = −10			150		ns
	Total harmonic distortion + noise (THD+N)	V _O = 3.5 V _{RMS} , G = +1, f = 1 kHz	R _L = 10 kΩ		0.000028 %		dB
					−130		
			R _L = 600 Ω		0.000028 %		dB
					−130		
HD2	Second-order harmonic distortion	V _O = 3.5 V _{RMS} , G = +1	f = 10 kHz		150		dBc
			f = 100 kHz		117		
			f = 500 kHz		100		
HD3	Third-order harmonic distortion	V _O = 3.5 V _{RMS} , G = +1	f = 10 kHz		170		dBc
			f = 100 kHz		130		
			f = 500 kHz		100		

Electrical Characteristics (continued)

At $T_A = 25^\circ\text{C}$, $(V^+) = 15\text{ V}$, $(V^-) = -15\text{ V}$, $V_{CM} = V_O = \text{midsupply}$, $C_L = 20\text{ pF}$, $R_L = 2\text{ k}\Omega$ connected to midsupply, unless otherwise noted.


PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
OUTPUT							
	Output linear range	R _L = 10 kΩ, A _{OL} > 114 dB		(V ⁻) + 1.5		(V ⁺) – 1.5	V
		T _A = –40°C to 125°C, R _L = 10 kΩ, A _{OL} > 114 dB		(V ⁻) + 1.5		(V ⁺) – 1.5	V
		R _L = 600 Ω, A _{OL} > 114 dB		(V ⁻) + 1.6		(V ⁺) – 1.6	V
		T _A = –40°C to 125°C, R _L = 600 Ω, A _{OL} > 114 dB		(V ⁻) + 1.6		(V ⁺) – 1.6	V
I _O	Output current	For linear operation, A _{OL} ≥ 110 dB		±30			mA
I _{SC}	Short-circuit current			±50			mA
C _L	Capactive load drive			200			pF
Z _O	Open-loop output impedance	f = 1 MHz, I _O = 0 mA		12.5			Ω
POWER SUPPLY							
V _S	Specified voltage			±4		±18	V
I _Q	Quiescent current (per amplifier)	I _O = 0 A		5.5		6.5	mA
		I _O = 0 A	T _A = 0°C to 85°C		7.1		mA
			T _A = –40°C to 125°C		7.7		mA
TEMPERATURE RANGE							
T _A	Operating junction temperature			–40		125	°C

7 Detailed Description

7.1 Overview

The OPA828 is a low-noise, high-speed JFET input amplifier providing the highest levels of precision and accuracy. Each device is laser trimmed in production to ensure the lowest input referred offset voltage. Likewise, input referred offset voltage drift is trimmed and guaranteed over the specified junction temperature range from -40°C to $+125^{\circ}\text{C}$. Additionally each device has its quiescent current laser trimmed to minimize part-to-part variations for dynamic parameters such as input referred noise voltage, gain-bandwidth product, slew rate, and settling time. The combination of low-noise, DC precision, and dynamic performance of the OPA828 is unsurpassed in the industry with the OPA828 taking full advantage of the latest and most advanced high-voltage, SiGe-complementary, JFET/bipolar process technology.

7.2 Functional Block Diagram

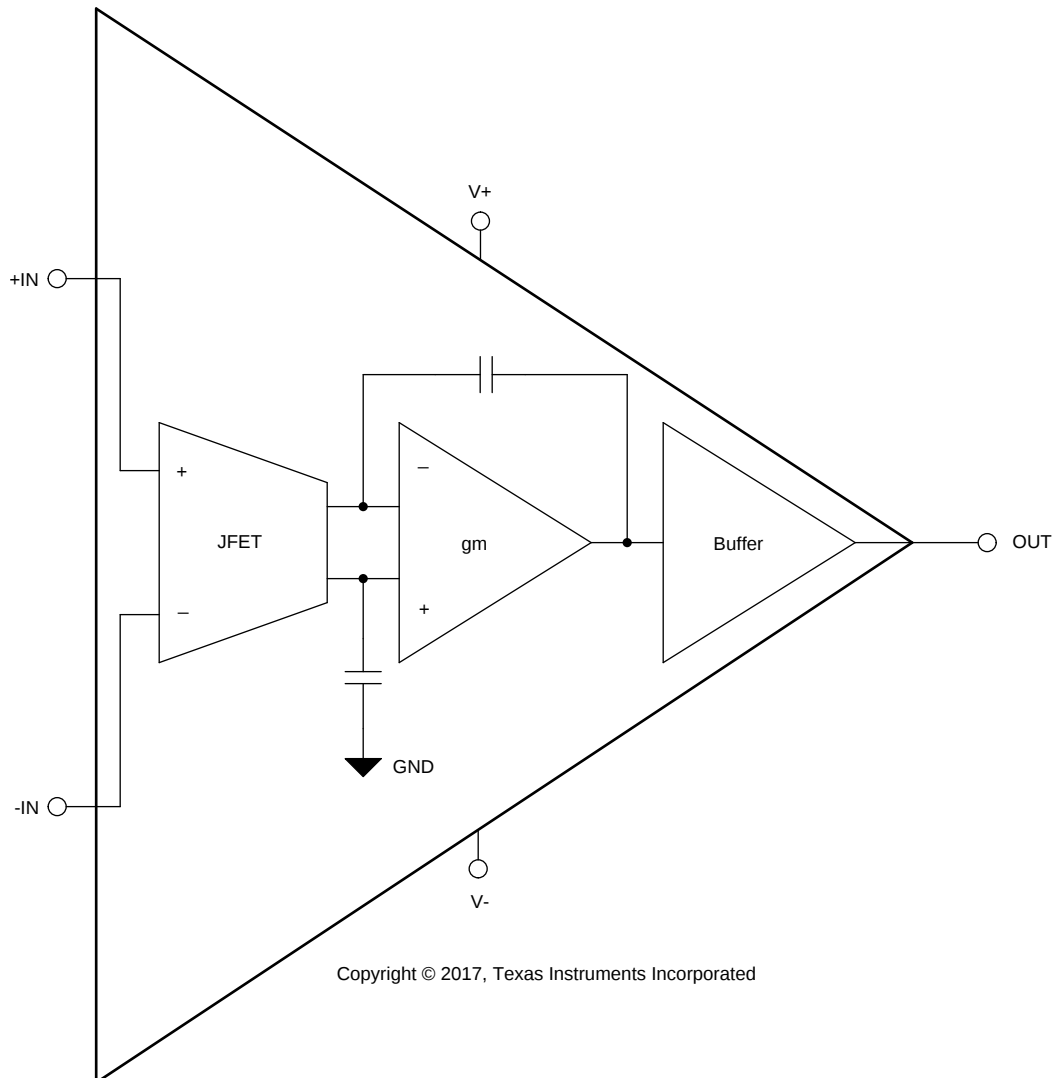

Copyright © 2017, Texas Instruments Incorporated

7.3 Feature Description

7.3.1 Operating Characteristics


The OPA828 operational amplifier is specified for operation from 8 V to 36 V (± 4 V to ± 18 V). Many of the specifications apply from -40°C to $+125^{\circ}\text{C}$.

7.3.2 Phase-Reversal Protection

Many operational amplifiers exhibit a phase reversal when the input drives beyond their specified input common-mode range. This condition is most often encountered in non-inverting circuits when the input drives beyond the specified common-mode voltage range, which can cause the output to reverse into the opposite rail. The OPA828 has an internal phase-reversal protection circuitry. The input architecture of the OPA828 prevents phase reversal with input common-mode voltages that exceed the specified maximum and minimum values. The OPA828 output limits to the appropriate rail. When input voltages can exceed the minimum or maximum specified limits, care must be taken to limit the maximum input current through internal ESD protection diodes.

7.3.3 Electrical Overstress

The OPA828 is internally protected against ESD events which can occur during manufacturing, handling, or printed-circuit-board assembly. The internal ESD protection diodes are not intended to protect the OPA828 during normal operation when the device is operating under power. The ESD protection circuitry involves several current-steering diodes connected from the input and output pins and routed back to the internal power-supply lines, where the diodes meet at the power-supply ESD cell, an absorption device, internal to the operational amplifier. This protection circuitry is intended to remain inactive during normal circuit operation. In cases where the inputs or output can be driven above the positive power supply or below the negative power supply care must be taken to limit the current through the internal diodes to 10 mA or less. In harsh electrical environments external protection circuitry may be required and is dependant upon the application requirements and environmental conditions.

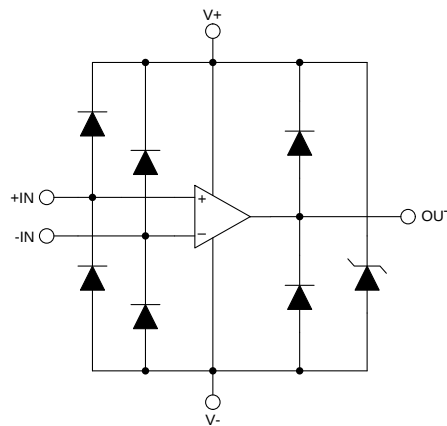


Copyright © 2018, Texas Instruments Incorporated

Figure 1. Equivalent Internal ESD Circuitry

One example of protecting the OPA828 inputs against an input over-voltage condition is illustrated in [Figure 2](#). In this example the non-inverting input to the OPA828 is protected with the addition of an external resistor. If the input voltage, V_{IN} , exceeds either power supply voltage, the input ESD diodes become forward biased at approximately 0.5 V. It is recommended to limit the current through the forward-biased internal ESD diodes under such conditions; see [Absolute Maximum Ratings](#). In this specific example illustrated in [Figure 2](#), the addition of the input resistor provides the necessary current limiting and allows for input voltages at V_{IN} up to ± 25.5 V. Assuming a symmetrical, dual power supply configuration, the maximum input voltage for this circuit configuration can be determined from [Equation 1](#):

$$\pm |V_{IN}| = |V_S| + 0.5V + 10mA \times R_{IN} \quad (1)$$

Feature Description (continued)

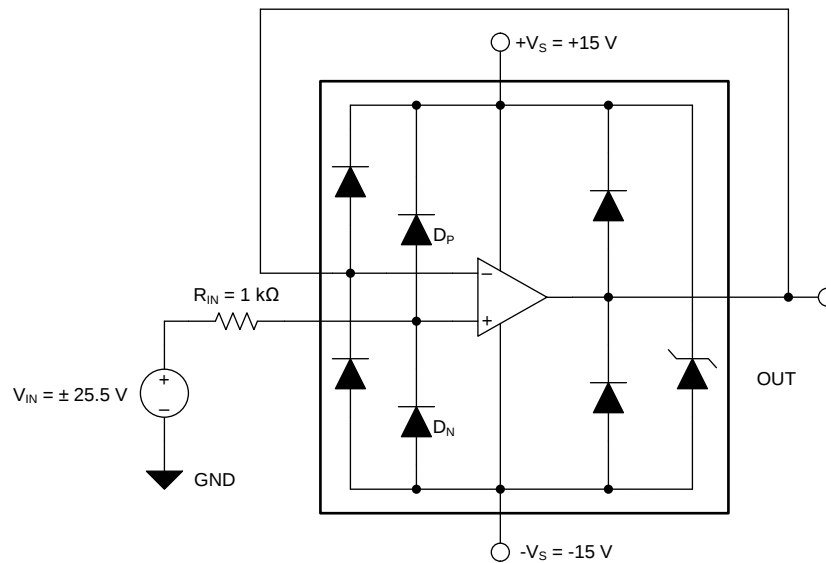


Copyright © 2018, Texas Instruments Incorporated

Figure 2. Limiting the Input Current

Adding the series input protection resistor as described above will add an additional source of noise to the circuit. Resistance values below 250 Ohms will contribute less than 10% of additional noise. A resistance value of 1k Ohm will increase the noise by approximately by 40%. The OPA828 has an equivalent input noise resistance of approximately 1k Ohm.

7.3.4 MUX Friendly Inputs

Multiplexing is a frequently-used technique to perform data acquisition in multi-channel systems with minimal signal-chain requirements. In this context, the role of the multiplexer (MUX) in an acquisition system is to switch between channels and send each signal as fast as possible to a single data converter — maximizing system throughput and minimizing delay. To ensure accurate processing, a precision amplifier is placed downstream from the multiplexer to precisely drive the analog-to-digital converter (ADC). This concept is illustrated in [Figure 3](#)

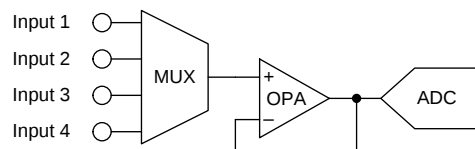


Copyright © 2018, Texas Instruments Incorporated

Figure 3. Typical Multiplexed System Block Diagram

In a typical multiplexed application it is common that large transient voltages can be presented to the input of the op amp driving the ADC. Large input differential voltages are commonly seen during slewing or open-loop operation, which is especially common when switching from one MUX input to another. Traditional precision amplifiers often consist of a differential transistor pair that is protected from large differential transient input voltages with anti-parallel diodes between the inputs of the amplifier. These anti-parallel diodes are effective at limiting the voltage differential between the inputs to one or two forward diode voltage drops, which protects the precision input devices from damage. However, the anti-parallel diodes do have considerable drawbacks such as large inrush currents when they are turned on. If passive filtering or high source impedance is present, large inrush current can disturb settling time, limiting the throughput of the system and degrading signal-chain precision. The OPA828 does not need anti-parallel diodes to protect the input JFET transistors and is free from large inrush currents even with differential input voltages as large as ± 36 V. These concepts are illustrated in [Figure 4](#):

Feature Description (continued)

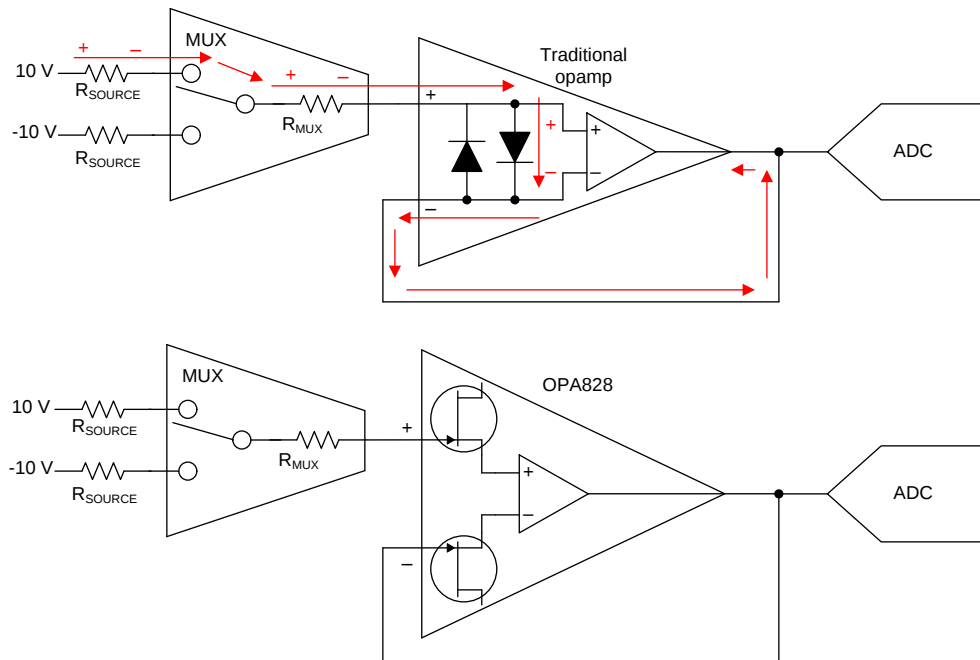

Copyright © 2018, Texas Instruments Incorporated

Figure 4. Typical Multiplexed System Block Diagram

7.3.5 Overload Supply Current Control

In many applications, tight limits on opamp power consumption exist and it is therefore highly desirable that the amplifier's power consumption remains constant even during fault conditions, such as a large voltage across the inputs or the output hitting the rail. In particular, high slew-rate amplifiers, such as the OPA828 temporarily increase the supply current when the amplifier is slewing. In slew-boosted amplifiers, the presence of a large input signal can present a specific problem, since it applies a large voltage across the amplifier's inputs. This will activate the slew-boost and can lead to a significant increase in current consumption. In addition, at high supply voltages the large current consumption can lead to significant amplifier self-heating.

OPA828 offers a high slew rate of 150V/us in combination with a comparably low supply current of 5.5mA. Like many other amplifiers, this is achieved by a so called slew-boosting method, which temporarily increases the amplifier's current consumption when the amplifier is slewing. Such a slewing condition is detected by measuring the voltage across the input pins. In quiescent condition, this voltage is very small (equal to the amplifier's offset). If, on the other hand, an input voltage is changed rapidly, a large voltage will be applied across the inputs and the amplifier output needs to slew. On OPA828, the supply current increase is gradual and proportional to the applied input voltage, ensuring a well-behaved large step response and excellent THD. Since the high slew rate ensures the output re-settles in less than about 300ns, the increased power consumption is absorbed by the decoupling capacitors, and therefore does not additionally load the power supplies.

In OPA828, such an increase in current consumption is avoided by an additional protection circuit, which continuously monitors both the amplifier's inputs and output. If a large input voltage is detected, the protection circuit checks for the presence of a rapid change in voltage at the output. If the output voltage is not changing, for instance because the output is at a supply rails, the protection circuit will disable the slew-boost circuit after a delay of about 300ns. After the overload condition is removed, the amplifier rapidly recovers to a normal operating condition.

Feature Description (continued)

7.3.6 Capacitive Load and Stability

The dynamic characteristics of the OPA828 are optimized for common operating conditions. The combination of low closed-loop gain and high capacitive loads decreases the phase margin of the amplifier and can lead to gain peaking or oscillations. As a result, heavier capacitive loads must be isolated from the output. The simplest way to achieve this isolation is to add a small resistor (for example, R_{OUT} equal to 50 Ω) in series with the output.

7.3.7 Settling Time

Settling time is a measure of an amplifiers output to settle to within some percentage (error band) of the input amplitude and is used to describe an amplifiers response to a step input. An amplifiers settling time is comprised of both a large signal response and small signal response. The large signal response is characterized by the rise and fall times while the small signal response is characterized by overshoot and ringing. Figure 5 illustrates the concepts and terminology associated with an amplifiers settling time. Specifically the settling time is defined as the time it takes the output to settle to within a specified error band from the time the input signal was applied.

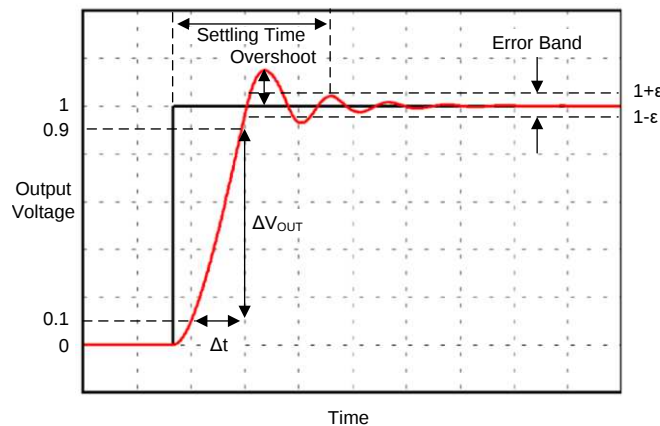


Figure 5. Settling Time

The OPA828 minimizes settling time for high-resolution systems by incorporating an internal slew boost circuit which minimizes rise and fall times and having wide bandwidth with excellent phase margin with low ringing, enabling small signal settling in minimal time. The OPA828 is trimmed in laser production that will minimize part-to-part variation in the device slew rate, bandwidth and phase margin thus mainlining excellent unit-to-unit variations across all manufacturing lots.

7.3.8 Slew Rate

The parameter of an amplifier that best describes the large signal dynamic behaviour is the slew rate. Slew rate is a measure the maximum rate of change of the output voltage with respect to time and is generally expressed in units of volts-per-microsecond, (V/ μ s). Typically the slew rate is measured as the time it takes for the output to swing from 10% of its final value to 90% of its final value. The slew rate for the signal illustrated in Figure 5 is given by Equation 2.

$$\text{Slew Rate} = \frac{\Delta V_{OUT}}{\Delta t} = \frac{(V_{OUT_{90}} - V_{OUT_{10}})}{(t_{90} - t_{10})} \quad (2)$$

The slew rate of an amplifier is limited by the internal architecture of the amplifier, the amplifiers quiescent power and internal capacitances. The OPA828 maximizes slew rate by incorporating a slew-boost circuit. The proprietary slew boost circuit used in the OPA828 results in a very high slew rate while maintaining low quiescent power levels. The internal slew boost circuit measures the input differential voltage present between +IN and -IN input pins. If this input differential voltage is sufficiently large enough, the internal slew boost circuit will increase the internal biasing currents of the amplifier thereby increasing the output's ability to slew faster. TI recommends placing power supply bypass capacitors close to the OPA828 to make sure of optimum dynamic performance.

Feature Description (continued)

Should the inputs of the amplifier have a large static or DC differential voltage present, the OPA828 recognizes that condition, not as an indicator of the need to slew faster, but rather as an overload condition. In this case the OPA828 internal biasing currents do not increase, and the quiescent current remains unchanged from normal operation.

7.3.9 Small Signal Response

The parameters of an amplifier the best describes the small signal dynamic behaviour are the gain-bandwidth product (GBP), unity gain frequency (UGF) and phase margin (PM) of an amplifier. The GBP is a useful parameter to determine the bandwidth of an application in closed loop configurations. Equation 3 can be used to approximate the closed loop bandwidth for the OPA828. Typically the GBP is a specified parameter with the amplifier configured in a non-inverting gain of 100 (40 dB). The GBP of an amplifier is generally assumed to be constant over frequency but in some higher speed amplifiers this is not always the case. The OPA828 has a constant GBP all the way to its UGF, as such the OPA828 open-loop gain has a constant –20 dB/decade slope (–6 dB/octave). The UGF is defined as the frequency at which the gain of the amplifier crosses 1V/V (0 dB). Figure 6 illustrates the concept of GBP and UGF. The OPA828 has both a GBP and UGF of 50 MHz.

$$\text{Bandwidth} = \frac{GBP}{A_{CL}} = \frac{50\text{MHz}}{A_{CL}} \quad (3)$$

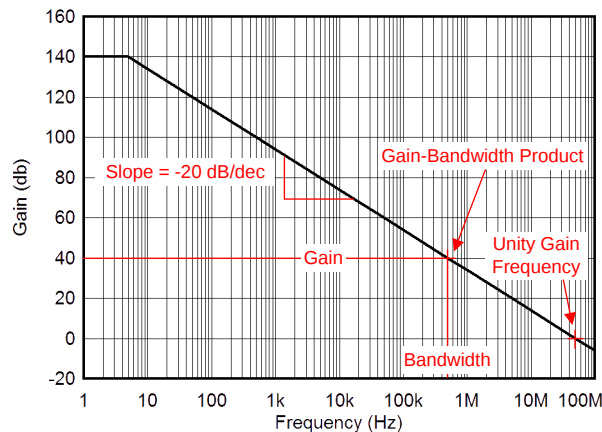


Figure 6. Gain-Bandwidth Product and Unity Gain Frequency

7.3.10 Thermal Shutdown

The OPA828 is protected from thermal overloads due to an internal thermal shutdown feature. The shutdown design assures thermal protection when operated in demanding, high-temperature industrial environments. The device accurately measures the die junction temperature at the hottest spot on the die. As the junction temperature reaches the thermal shutdown temperature the device is disabled by placing the output into a high impedance state — this prevents further power dissipation by the OPA828 and allows the OPA828 to begin cooling. Once the junction temperature reduces by the thermal hysteresis amount, the OPA828 resumes normal operation. If the output condition that caused the OPA828 to heat up is still present the device may enter thermal shutdown again. The OPA828 quiescent current during shutdown reduces to approximately 20 μ A. Identify the cause of any thermal shutdown, and correct for normal device operation. Thermal shutdown occurs when the OPA828 junction temperature exceeds approximately 165°C. Once in thermal shutdown, the OPA828 returns to normal operation when the junction temperature cools to approximately 145°C.

7.3.11 Low Noise

The OPA828 is fabricated on a state-of-the-art SiGe Precision, High-Speed, High-Voltage, BiFET wafer process. Patented wafer processing techniques are used to reduce the noise associated with the JFET gate regions.

Feature Description (continued)

7.3.12 Low Offset Voltage Drift

Each OPA828 is laser trimmed in production. Input offset voltage is trimmed at two temperatures assuring low input offset voltage drift across the full temperature range.

7.3.13 Overload Recovery

Overload recovery is defined as the time required for the op amp output to recover from the saturated state to the linear state. The output devices of the op amp enter the saturation region when the output voltage exceeds the rated operating voltage resulting from the high input voltage or the high gain. After the device enters the saturation region, the charge carriers in the output devices must have time to return back to the normal state. After the charge carriers return back to the equilibrium state, the device begins to slew at the normal slew rate. As a result, the propagation delay (in case of an overload condition) is the sum of the overload recovery time and the slew time.

7.4 Device Functional Modes

7.4.1 Functional Modes

The OPA828 is operational when the applied power supply voltage is between ± 4 V and ± 20 V. When operating the OPA828 device self-heating occurs. Device self-heating is a function of the power-supply voltage and power delivered to the load. Under heavy loading conditions and elevated ambient temperatures the OPA828 may enter thermal shutdown. Thermal shutdown occurs when the OPA828 junction temperature exceeds approximately 165°C. Once in thermal shutdown, the OPA828 returns to normal operation when the junction temperature cools to approximately 145°C.

8 Application and Implementation


NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

Low-pass filters are commonly employed in signal processing applications to reduce noise and prevent aliasing. The OPA828 is designed to construct high-speed, high-precision active filters. Figure 7 shows a second-order, low-pass filter commonly encountered in signal processing applications.

8.2 Typical Application

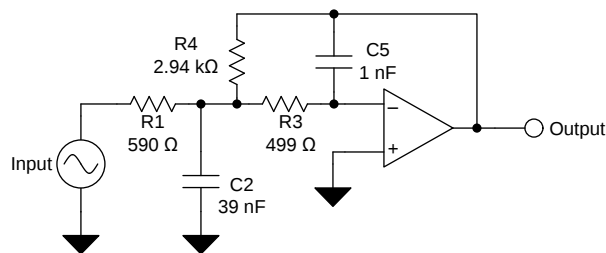

Copyright © 2016, Texas Instruments Incorporated

Figure 7. Typical OPA828 Application Schematic

8.2.1 Design Requirements

Use the following parameters for this design example:

- Gain = 5 V/V (inverting gain)
- Low-pass cutoff frequency = 25 kHz
- Second-order Chebyshev filter response with 3-dB gain peaking in the passband

8.2.2 Detailed Design Procedure

The infinite-gain multiple-feedback circuit for a low-pass network function is shown in Figure 7. Use Equation 4 to calculate the voltage transfer function.

$$\frac{\text{Output}}{\text{Input}}(s) = \frac{-1/R_1 R_3 C_2 C_5}{s^2 + (s/C_2)(1/R_1 + 1/R_3 + 1/R_4) + 1/R_3 R_4 C_2 C_5} \quad (4)$$

This circuit produces a signal inversion. For this circuit, the gain at dc and the low-pass cutoff frequency are calculated by Equation 5:

$$\text{Gain} = \frac{R_4}{R_1}$$

$$f_c = \frac{1}{2\pi} \sqrt{1/R_3 R_4 C_2 C_5} \quad (5)$$

Software tools are readily available to simplify filter design. WEBENCH® Filter Designer is a simple, powerful, and easy-to-use active filter design program. The WEBENCH Filter Designer lets designers create optimized filter designs using a selection of TI operational amplifiers and passive components from TI's vendor partners.

Available as a web-based tool from the WEBENCH® Design Center, WEBENCH® Filter Designer allows to design, optimize, and simulate complete multi-stage active filter solutions within minutes.

Typical Application (continued)

8.2.3 Application Curve

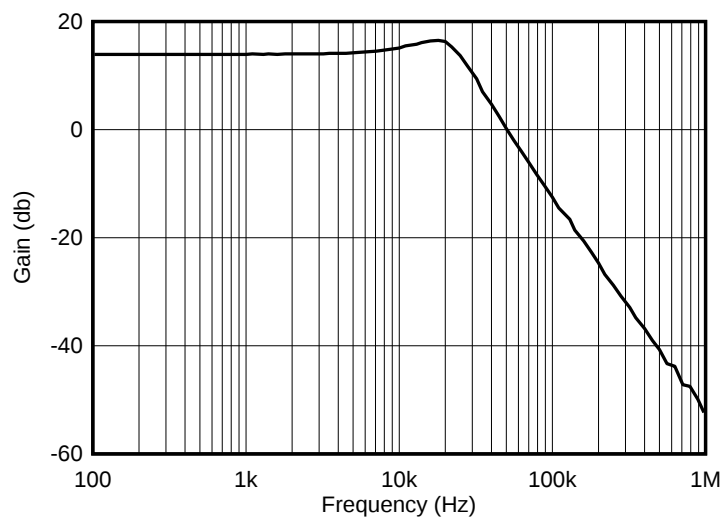


Figure 8. Low-Pass Filter Transfer Function

9 Power Supply Recommendations

The OPA828 is specified to operate from 8 V to 36 V (± 4 V to ± 18 V); many specifications apply from -40°C to $+125^{\circ}\text{C}$.

Place 0.1- μF bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high impedance power supplies. For more detailed information on bypass capacitor placement, refer to the [Layout](#) section.


10 Layout

10.1 Layout Guidelines

For best operational performance of the device, use good printed circuit board (PCB) layout practices, including the following guidelines:

- Noise can propagate into analog circuitry through the power pins of the circuit as a whole and op amp itself. Use bypass capacitors to reduce the coupled noise by providing low-impedance power sources local to the analog circuitry.
- Connect low-ESR, 0.1- μ F ceramic bypass capacitors between each supply pin and ground, placed as close as possible to the device. A single bypass capacitor from V+ to ground is applicable for single-supply applications.
- Separate grounding for analog and digital portions of circuitry is one of the simplest and most-effective methods of noise suppression. One or more layers on multilayer PCBs are usually devoted to ground planes. A ground plane helps distribute heat and reduces EMI noise pickup. Make sure to physically separate digital and analog grounds paying attention to the flow of the ground current.
- To reduce parasitic coupling, run the input traces as far away from the supply or output traces as possible. If these traces cannot be kept separate, crossing the sensitive trace perpendicular is much better as opposed to in parallel with the noisy trace.
- Place the external components as close as possible to the device.
- Keep the length of input traces as short as possible. Always remember that the input traces are the most sensitive part of the circuit.
- Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.
- TI recommends cleaning the PCB following board assembly for best performance.
- Any precision integrated circuit may experience performance shifts due to moisture ingress into the plastic package. Following any aqueous PCB cleaning process, baking the PCB assembly is recommended to remove moisture introduced into the device packaging during the cleaning process. A low-temperature, post-cleaning bake at 85°C for 30 minutes is sufficient for most circumstances.

10.2 Layout Example

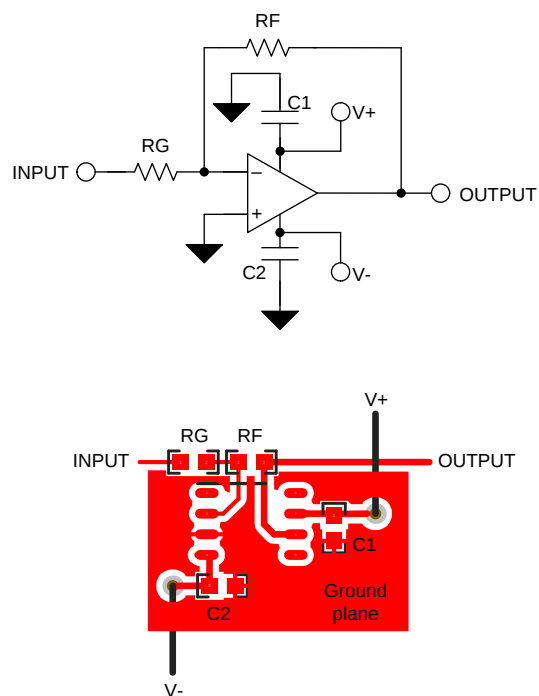

Copyright © 2017, Texas Instruments Incorporated

Figure 9. OPA828 PCB Example

11 Device and Documentation Support

11.1 Device Support

11.1.1 Development Support

For development support see the following:

[WEBENCH® Filter Designer](#)

11.2 Documentation Support

11.2.1 Related Documentation

For related documentation see the following:

[Compensate Transimpedance Amplifiers Intuitively](#)

11.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

11.4 Community Resource

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

11.5 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

11.6 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

11.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
OPA828ID	PREVIEW	SOIC	D	8	75	TBD	Call TI	Call TI	-40 to 125		
OPA828IDR	PREVIEW	SOIC	D	8	2500	TBD	Call TI	Call TI	-40 to 125		
POPA828ID	ACTIVE	SOIC	D	8	75	TBD	Call TI	Call TI	-40 to 125		Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.


(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

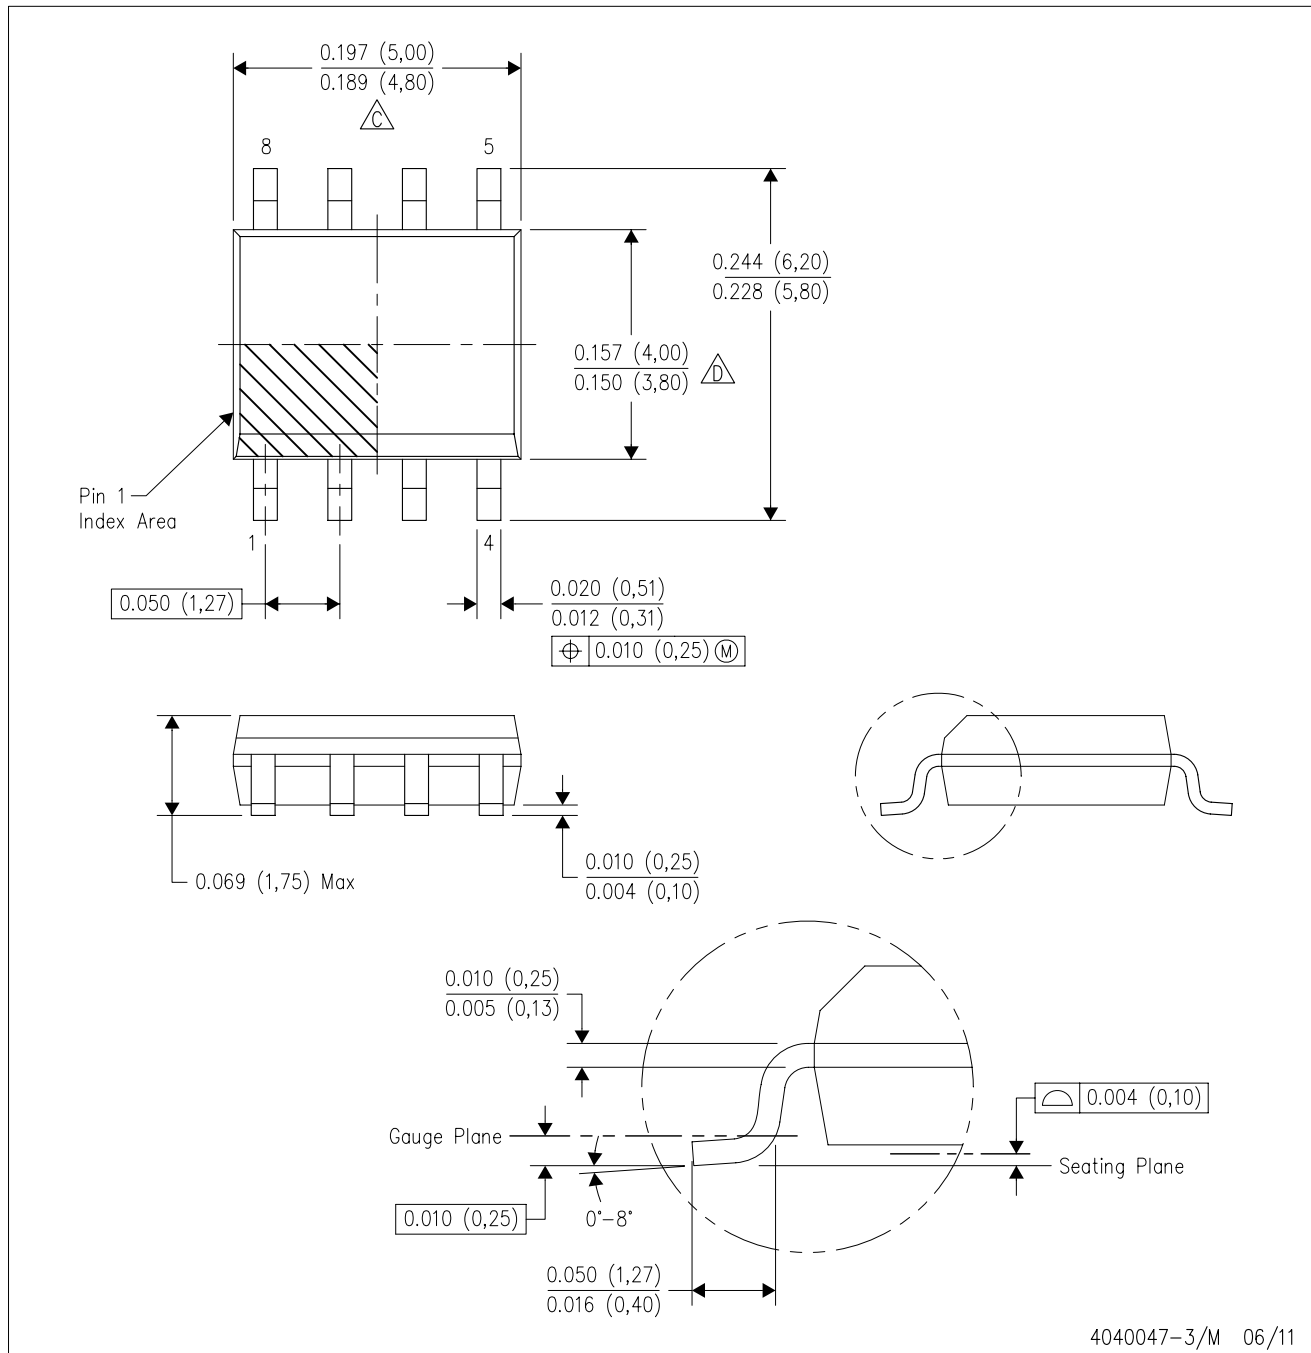

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - $\triangle C$ Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - $\triangle D$ Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AA.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2018, Texas Instruments Incorporated